

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
13 June 2002 (13.06.2002)

PCT

(10) International Publication Number  
**WO 02/46196 A1**

- (51) International Patent Classification<sup>7</sup>: C07D 493/04      **UNTERNÄHRER, Heinz** [CH/CH]; Widhagweg 46, CH-4303 Kaiseraugst (CH).
- (21) International Application Number: PCT/EP01/14771
- (22) International Filing Date: 5 December 2001 (05.12.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
0029895.0      7 December 2000 (07.12.2000)      GB
- (71) Applicant (for all designated States except AT, US): **NOVARTIS AG** [CH/CH]; Lichtstrasse 35, CH-4056 Basle (CH).
- (71) Applicant (for AT only): **NOVARTIS-ERFINDUNGEN VERWALTUNGSGESELLSCHAFT M.B.H.** [AT/AT]; Brunner Strasse 59, A-1230 Vienna (AT).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **KÜSTERS, Ernst** [DE/DE]; Gallenweilerweg 1, 79427 Eschbach (DE).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LT, LU, LV, MA, MD, MK, MN, MX, NO, NZ, OM, PH, PL, PT, RO, RU, SE, SG, SI, SK, TJ, TM, TR, TT, UA, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).
- Published:  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

WO 02/46196 A1

(54) Title: PROCESS FOR THE ISOLATION AND PURIFICATION OF EPOTHILONES

(57) Abstract: The invention relates to a desorption process for epothilones, especially epothilone A and/or epothilone B, from resins and new production, work-up or purification processes or manufacturing methods for epothilones comprising said desorption process, as well as the use of certain solvents for the desorption of epothilones from resins.


EX-100  
WWW.WIPO.ORG  
COPY

## PROCESS FOR THE ISOLATION AND PURIFICATION OF EPOTHILONES

The invention relates to a new desorption process for epothilones, especially epothilone A and/or epothilone B, from resins and new production, work-up or purification processes or manufacturing methods for epothilones comprising said desorption process, as well as the use of certain solvents for the desorption of epothilones from resins.

### Background of the invention:

Epothilones A and B represent a new class of microtubull-stabilising cytotoxic active ingredients (see Gerth, K. et al., J. Antibiot. 49, 560-3 (1966)) of the formulae:

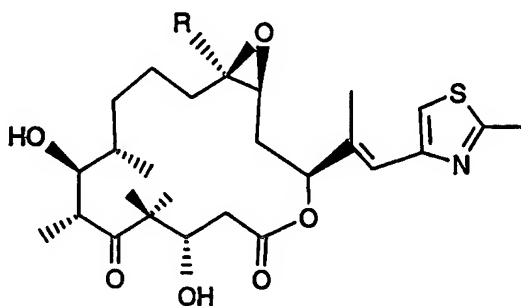

wherein R signifies hydrogen (epothilone A) or methyl (epothilone B).

Since the description of these epothilones (see WO 93/10121), several methods have been disclosed for the synthesis and manufacture both of the epothilones and mainly of numerous epothilone derivatives (collectively called „epothilones“ hereinafter), for example those disclosed in WO 99/03848, WO 00/49020, WO 00/49021, WO 00/47584, WO 00/00485, WO 00/23452, WO 99/03848, WO 00/49019, WO 99/07692, WO 98/22461, WO 99/65913, WO 98/38192, WO 00/50423, WO 00/22139, WO 99/58534, WO 97/19086, WO 98/25929, WO 99/67252, WO 99/67253, WO 00/31247, WO 99/42602, WO 99/28324, WO 00/50423, WO 00/39276, WO 99/27890, WO 99/54319, WO 99/54318, WO 99/02514, WO 99/59985, WO 00/37473, WO 98/08849, US 6,043,372, US 5,969,145, WO 99/40047, WO 99/01124, and WO 99/43653. In addition to epothilone A and epothilone B, especially the epothilones D and E, described in WO 97/19086 and WO 98/22461, and the epothilones E and F, described in WO 98/22461, as well as the epothilones described in WO 99/02514 show interesting properties.

As an example for the therapeutic use, International Application WO 99/43320 describes a number of ways of administration of epothilones as agents against proliferative diseases, especially tumor diseases, that, due to their similar mechanism, act in a way comparable to that of Taxol®, a well-known and marketed anticancer agent. WO 99/39694 discloses some specific formulations of the epothilones, especially A and B.

The epothilones, especially epothilone A and most preferably epothilone B, offer a number of advantages in comparison to established treatments, especially also in cases where tumors have become refractory to the treatment with Taxol. Therefore, methods for their synthesis in larger amounts are urgently required in order to meet anticipated demands.

The most efficient production processes so far at least comprise some biosynthetic steps and isolation of epothilones from culture media or the like.

Originally, the extraction of natural substances by means of myxobacteria, especially the epothilones from the cell strain *Sorangium Cellulosum Soce90* (deposited under no. 6773 at the German Collection of Microorganisms, see WO 93/10121) was described in literature. In order to obtain a satisfactory concentration of the natural substances, especially the epothilones, previously an adsorbate resin based on polystyrene was always added to the culture medium for absorption to the medium, for example Amberlite XAD-1180 (Rohm & Haas, Frankfurt, Germany).

However, the disadvantage of this process is that, on a large scale, it leads to an abundance of problems. Valves are impaired by the globules of resin, pipes can block, and apparatus may be subject to greater wear due to mechanical friction. The globules of resin are porous and therefore have a large inner surface area (about 825 m<sup>2</sup>/gram resin). Sterilisation becomes a problem, as air enclosed in the resin is not autoclaved. Thus, the process cannot be practicably carried out on a large scale using resin addition during cultivation of the microorganisms that produce epothilones.

Therefore an advanced process for the production of epothilones, especially of epothilones A and B, was found and described in WO 99/42602. That method comprises complexing of epothilones from culture media of epothilone-producing microorganisms, said media com-

prising cyclodextrines or other complex-forming agents, mixing of the cell-free culture medium (e.g. filtrate or centrifugate of said culture medium) with a synthetic resin, for example a resin based on styrene/divinylbenzene copolymers as matrix, such as Amberlite XAD-16 (Rohm & Haas Germany GmbH, Frankfurt, Germany) or Diaion HP-20 (Resindion S.R.L., Mitsubishi Chemical Co., Milan, Italy) in order to absorb the epothilones and desorption, especially with an alcohol, most preferably isopropanol. This is followed by addition of water to the alcohol phase, removal of the solvent phase (preferably by evaporation), phase separation of the resulting residue in the presence of an ester, especially ethyl acetate or isopropyl acetate, usually molecular filtration (gel chromatography) of the dried ester phase, separation of the resulting epothilone mixture by reverse phase HPLC (preferably by elution with a mixture of nitrile/water, e.g. acetonitrile/water), and optionally further purification by phase separation in the presence of a water/ether mixture, preferably subsequent adsorption chromatography on silica gel in order to achieve further removal of impurities, and crystallisation/recrystallisation.

Though a useful progress and appropriate for industrial scale production, this method still suffers from certain disadvantages.

For example, in order to obtain sufficient purity, it is advisable to make use of either the molecular filtration step or the silica gel adsorption chromatography step or both. More difficulties come from the phase separation in the presence of an ester, such as ethyl acetate, which (especially due to the long time for phase separation of the water/ester phase in large industrial scale) is very time-consuming, as well as the subsequent evaporation, which in addition is difficult to handle in view of foaming and sputtering.

It is thus a problem to be solved by the present invention to avoid as many of the above difficulties as possible and find new and advantageous ways for the isolation of epothilones, especially epothilones A and B, after their adsorption to a resin.

#### General Description of the Invention

Very surprisingly, it has now been found that by simple replacement of the alcohols used as desorption solvent with certain other solvents (named weakly polar or apolar solvents as specified below) provides a real breakthrough that can be achieved in order to obtain a solution to the problems mentioned above, leading to additional advantages such as

improved desorption and higher final yield. Among the additional advantages are (i) higher selectivity of desorption; (ii) higher amount of desorbed epothilones, indicating more complete desorption; (iii) no re-extraction with ester (e.g. ethyl acetate) with the highly problematic water/ester phase separation and no subsequent ether evaporation required; (iv) no molecular filtration and usually no adsorption chromatography are required; (v) the time required for desorption is diminished considerably; (vi) fewer process steps, (vii) diminished contamination risk (important with the highly toxic epothilones), and/or (viii) better and safer handling (depending on the solvent used for desorption = extraction); and (ix) also depending on the solvent unexpectedly even lower amounts of by-products or impurities with similar polarity as the epothilones, especially as epothilone B, need to be removed after reversed phase chromatography. These and further advantages can be deduced from the details given in the subsequent Detailed Description of the Invention:

#### Detailed Description of the Invention

One aspect of the invention relates to a process for desorbing epothilones, especially epothilone A and/or B, in particular epothilone B, from a resin, especially a synthetic resin, with a weakly polar or apolar solvent.

A further aspect relates to a process for working up (or purifying) epothilones, especially after their production in a standard medium for chemical synthesis or preferably a culture medium which comprises microorganisms, especially myxobacteria, in particular of the genus *Sorangium*, which are suitable for producing epothilones, especially epothilone A and/or B, and a complex-forming component, said process comprising the use of a weakly polar or apolar solvent for the desorption of said epothilones from a resin.

A third aspect of the invention relates to the use of a weakly polar or apolar solvent for the desorption of epothilones, especially epothilone A and/or B, in particular epothilone B, from a resin, especially a synthetic resin.

The general terms used hereinabove and hereinbelow preferably have the meanings given hereinbelow:

The term "epothilones" preferably relates to any epothilone or epothilone derivative mentioned in the patent applications WO 99/03848, WO 00/49020, WO 00/49021, WO 00/47584,

WO 00/00485, WO 00/23452, WO 99/03848, WO 00/49019, WO 99/07692, WO 98/22461, WO 99/65913, WO 98/38192, WO 00/50423, WO 00/22139, WO 99/58534, WO 97/19086, WO 98/25929, WO 99/67252, WO 99/67253, WO 00/31247, WO 99/42602, WO 99/28324, WO 00/50423, WO 00/39276, WO 99/27890, WO 99/54319, WO 99/54318, WO 99/02514, WO 99/59985, WO 00/37473, WO 98/08849, US 6,043,372, US 5,969,145, WO 99/40047, WO 99/01124, and/or WO 99/43653, more preferably to epothilone A and especially epothilone B, but in a broader aspect of the invention also to the epothilones D and E, described in WO 97/19086 and WO 98/22461, the epothilones E and F, described in WO 98/22461, or the epothilones described in WO 99/02514. All these documents, especially with regard to the epothilone derivatives and the preferred epothilone derivatives mentioned therein, are herewith enclosed by reference.

A weakly polar or apolar solvent preferably has the following characteristics:

Preferred is a solvent that, in the eluotropic row determined according to Snyder et al., J. Chromatogr. Sci. 16, 223 (1978), shows the following characteristics, where  $x_a$  is the proton acceptor parameter (indicator of the tendency to form hydrogen bonds as hydrogen acceptor),  $x_d$  is the proton donor parameter (indicator of the tendency to form hydrogen bonds as hydrogen donor) and  $x_n$  is the dipole parameter (indicating the dipole character), with the proviso that  $x_a + x_d + x_n = 1$ , or a mixture of such solvents:

$x_a = 0,20-0,40$ ;  $x_d = 0,15-0,36$ ; and  $x_n = 0,38-0,60$ ; preferably  
 $x_a = 0,22-0,32$ ;  $x_d = 0,17-0,34$ ; and  $x_n = 0,39-0,54$ .

Very preferred among the weakly polar or apolar solvents are lower alkyl-lower alkyl ketones or cyclic ketones, such as acetone, methyl ethyl ketone, 2-pentanone, methyl-isobutyl-ketone or cyclohexanone, more preferably ethers, especially cyclic ethers, more especially tetrahydrofuran or dioxan; still more preferably aliphatic halogen compounds, especially lower alkyl halogenides, especially methylene dichloride (= methylenechloride) or ethylene dichloride; or most especially aromatic solvents, especially naphthalene or (preferably) benzene or naphthaline or (preferably) benzene substituted by one or more, preferably one to three moieties selected from the group consisting of lower alkyl, especially methyl, ethyl or isopropyl, lower alkoxy, especially methoxy or ethoxy, halogen, especially fluoro, chloro, bromo or iodo, nitro and lower alkoxy-lower alkyl, especially ethoxymethyl; especially tolu-

ene, ethyl-benzene, xylene, especially o-, m- or p-xylene, mesitylene, pseudo-cumene, hemellitene, cumene, isopropyl-toluene, phenyl halogenides, especially fluorobenzene, chlorobenzene, bromobenzene or iodobenzene, lower alkoxy benzenes, especially ethoxybenzene or methoxybenzene, or lower alkoxy-lower alkyl benzenes, especially ethoxymethyl benzene (benzyl ether); or any mixture of two or more, for example 2 to 4 of these solvents; most preferred are lower alkyl-benzenes; especially ethyl-benzene, xylene, especially o-, m- or p-xylene, mesitylene, pseudo-cumene, hemellitene, cumene, isopropyl-toluene, and most especially toluene.

The term "weakly polar or apolar solvent" also includes mixtures of two or more of the solvents described hereinbefore and hereinafter, e.g. of 2 to 4 such solvents.

The prefix "lower" always indicates that the correspondingly named radical contains preferably up to a maximum of 7 carbon atoms, in particular up to 4 carbon atoms, and is branched or unbranched. Lower alkyl may be for example unbranched or branched once or more, and is e.g. methyl, ethyl, propyl such as isopropyl or n-propyl, butyl such as isobutyl, sec-butyl, tert-butyl or n-butyl, or also pentyl such as amyl or n-pentyl.

Halogen is preferably iodo, bromo, chloro or fluoro.

A hydrocarbon preferably is an organic compound having 4 to 32, more preferably 4 to 20, still more preferably 6 to 16 carbon atoms and may be aliphatic, e.g. a linear, branched or cyclic saturated alkane, e.g. cyclohexane, a linear, branched or cyclic (non-aromatic) organic compound with one or more double and/or triple bonds, or an aromatic hydrocarbon, the latter being unsubstituted or substituted by one or more, e.g. up to three, substituents selected from the group consisting of lower alkyl, especially methyl, ethyl or isopropyl, lower alkoxy, especially methoxy or ethoxy, halogen, especially fluoro, chloro, bromo or iodo, nitro and lower alkoxy-lower alkyl, especially ethoxymethyl; preferably by one to three lower alkyl moieties.

An alcohol is preferably a hydroxy-lower alkane, especially methanol, ethanol or n- or isopropanol.

A resin is especially a synthetic resin, preferably a resin based on styrene and divinylbenzene copolymers, more preferably Amberlite XAD-4 or preferably Amberlite XAD-16 [Rohm & Haas Germany GmbH, Frankfurt] or Diaion HP-20 [Resindion S.R.L., Mitsubishi Chemical Co., Milan]. It goes without saying that a resin from which an epothilone or epothilones are to be desorbed in accordance with the invention has epothilones non-covalently in contact with it (e.g. reversibly bound to it or adsorbed to it). In other terms, where the term "resin" is used, it is intended to mean "resin having one or more epothilones in contact with it, especially reversibly bound or adsorbed to it".

Preferred Aspects of the invention:

In a preferred aspect of the invention, the invention relates to a process comprising a desorption from a resin with a weakly polar or apolar solvent as described above or below, comprising any further purification steps desirable or required to come to the respective epothilones, especially epothilone A and most especially epothilone B, in pure form, preferably those described as preferable in the present invention.

Working up of the epothilones is preceded by the reaction or process leading to a reaction product comprising epothilones to be worked up which are isolated (i) either from chemical reaction mixtures after solution in an appropriate polar aqueous medium, or (ii) more preferably from the supernatant (for example a cyclodextrine containing one as described in WO 99/42602) of a culture medium with microorganisms producing the epothilones by separating a culture into the liquid phase (e.g. centrifugate or filtrate) and solid phase (cells), especially by means of filtration or centrifugation (tubular centrifuge or separator).

This pretreatment is then preferably continued by directly mixing the solution ((i)) or liquid phase ((ii)) with a resin, especially a synthetic resin, especially a resin based on styrene and divinylbenzene copolymers as matrix (hereinafter referred to also simply as polystyrene resin), such as Amberlite XAD-16 or Diaion HP-20 (preferably in a ratio of centrifugate: resin volume of ca. 10:1 to 100:1, preferably about 50:1). After a period of contact of preferably 0.25 to 50 hours, especially 0.8 to 22 hours, the resin is separated, for example by filtration, sedimentation or centrifugation. If required, after adsorption the resin is washed with a strongly polar solvent, preferably with water.



Then the preferred process of working up according to the present invention starts. Desorption of the epothilones (as such forming a very preferred aspect of the invention) is effected with a weakly polar or apolar solvent, in particular with lower alkyl halogenides, especially methylene dichloride or ethylene dichloride, or more preferably aromatic solvents, especially naphthalene or (preferably) benzene, or naphthalene or (preferably) benzene substituted by one or more, preferably one to three moieties selected from the group consisting of lower alkyl, especially methyl, ethyl or isopropyl, lower alkoxy, especially methoxy or ethoxy, halogen, especially fluoro, chloro, bromo or iodo, nitro and lower alkoxy-lower alkyl, especially ethoxymethyl; most preferably toluene. The step of extraction may be repeated one or more times, preferably 0 to 3 times, especially once, in order to obtain more complete desorption where necessary or desired.

The working up of the (in case of repeated extraction combined) solutions of desorbed epothilones thus obtainable preferably continues with the removal of the solvent used for desorption from the resulting solutions by evaporation (distillation), preferably by means of concentration in a reactor and subsequently in a rotary evaporator under vacuum.

Subsequently, further processing takes place using the following steps, where the purification step by means of reversed-phase chromatography with elution with a nitrile is compulsory, while the other steps are optional:

- crystallization of the epothilone(s) after desorption; especially, for the crystallization of epothilone B, a mixture of an alcohol and a hydrocarbon, especially of a lower alkanol and a cyclic aliphatic hydrocarbon with 3 to 10 ring atoms, most especially of methanol and cyclohexane (preferably in a v/v ratio of 1:10 to 10:1, especially of 1:3 to 3:1, is added. Addition of water leads to fast phase separation, and the alcohol phase is evaporated to dryness, e.g. by means of a rotary evaporator under vacuum. The resulting extract which comprises the epothilone B is afterwards crystallized from an appropriate solvent mixture, especially from an alcohol/cyclic aliphatic hydrocarbon mixture, most preferably isopropanol/cyclohexane, preferably in a v/v ratio of 1:10 to 10:1, more preferably 1:6 to 6:1, most preferably 1:6 to 1:4;

- (obligatory) separation of the epothilones by reversed-phase chromatography after being taken up in a suitable solvent, especially a mixture of a nitrile and water, preferably acetonitrile/water, in a preferred v/v ratio of 1:10 to 10:1, especially 1:3 to 1:1, and elution with a

mixture of nitrile and water, preferably characterised in that the chromatography is carried out on column of a reversed phase material, which is charged with hydrocarbon chains, such as hydrocarbon chains containing 18 carbon atoms, especially an RP-18 material, and an eluant comprising a nitrile, especially a lower alkyl nitrile, in particular acetonitrile, is used, in particular a mixture of nitrile/water is used, especially a mixture of acetonitrile/water, preferably in a ratio of nitrile to water of about 1:99 to 99:1, primarily between 1:9 and 9:1, e.g. between 2:8 and 7:3, e.g. 3:7 or 4:6; and removal of the nitrile from the collected epothilone (especially epothilone A or most especially epothilone B) comprising fractions by evaporation (distillation); if desired, the remaining water with the epothilone is then extracted with an ester, especially a lower alkyl-lower alkanoate, preferably isopropyl acetate, with subsequent evaporation (preferably first in a reactor, then in a rotary evaporator under vacuum) of the epothilone containing ester phase to dryness; (if required, the starting epothilone solution may be split and separated in more than one reverse phase separate runs;)

- only if required (e.g. as an alternative to the crystallization after desorption) adsorption chromatography, in particular by adding to a column of silica gel and eluting with an appropriate solvent or solvent mixture, especially a mixture of ester/hydrocarbon, for example lower alkyl alkanoate / C<sub>4</sub>-C<sub>10</sub>-alkane, especially ethyl or isopropyl acetate / n-hexane, in which the ratio between the ester and hydrocarbon is preferably in the range 99:1 to 1:99, preferably 10:1 to 1:10, for example 4:1;

- and finally recrystallisation, e.g. from appropriate solvents or solvent mixtures, for example consisting of esters, ester/hydrocarbon mixtures or alcohols, especially ethyl or isopropyl acetate : toluene 1:10 to 10:1, preferably 2:3 (epothilone A) or methanol or ethyl acetate (epothilone B);

in which process, if necessary and/or desired, between each step being employed, the resulting solutions or suspensions are concentrated, and/or liquid and solid components are separated from one another, in particular by sedimenting, filtering or centrifuging of solutions/suspensions. The more precise definitions mentioned above and below can be preferably used in the above individual steps.

A preferred aspect of the invention relates also to a process for the isolation of epothilones adsorbed to a synthetic resin, especially epothilone A or most especially epothilone B, which process comprises

- (i) the desorption of the epothilones from said synthetic resin with a weakly polar or apolar solvent, in particular with lower alkyl halogenides, especially methylene dichloride or ethylene dichloride, or more preferably aromatic solvents, especially naphthalene or (preferably) benzene, or naphthaline or (preferably) benzene substituted by one or more, preferably one to three moieties selected from the group consisting of lower alkyl, especially methyl, ethyl or isopropyl, lower alkoxy, especially methoxy or ethoxy, halogen, especially fluoro, chloro, bromo or iodo, nitro and lower alkoxy-lower alkyl, especially ethoxymethyl; most preferably toluene; or in a broader aspect of the invention a mixture of two or more such solvents; and
- (ii) separation of the epothilones by reversed-phase chromatography after being taken up in a suitable solvent, especially a mixture of a nitrile and water, preferably acetonitrile/water, in a preferred v/v ratio of 1:10 to 10:1, especially 1:3 to 1:1, and elution with a mixture of nitrile and water, preferably characterised in that the chromatography is carried out on column of a reversed phase material, especially an RP-18 material, which is charged with hydrocarbon chains, such as hydrocarbon chains containing 18 carbon atoms, and an eluant comprising a nitrile, especially a lower alkyl nitrile, in particular acetonitrile, is used, in particular a mixture of nitrile/water is used, especially a mixture of acetonitrile/water, preferably in a ratio of nitrile to water of about 1:99 to 99:1, primarily between 1:9 and 9:1, e.g. between 2:8 and 7:3, e.g. 3:7 or 4:6.

In a further preferred aspect of the invention, the process in the last paragraph starting with step (i) and comprising step (ii) further implies any further purification steps desirable or required to come to the respective epothilones, especially epothilone A and most especially epothilone B, in pure form, preferably those described as preferable in the present invention.

Preparation for working up is preferably carried out as follows: Adsorption of the epothilones, especially from chemical reaction mixtures or more preferably from the supernatant of cultures of microorganisms, can be achieved as described in WO 99/42602 or in analogy thereto; briefly, the epothilones are found in the centrifugate, which is then directly mixed with a synthetic resin, especially a styrene/divinylbenzene copolymer resin, such as Amber-

lite XAD-16 or Diaion HP-20 (preferably in a ratio of centrifugate: resin volume of ca. 10:1 to 100:1, preferably about 50:1) and stirred in an agitator. In this step, the epothilones are transferred to the resin. After a period sufficient for adsorption, e.g. period of contact of ca. 0,2 to 10 h, the resin is separated by centrifugation or filtration. Adsorption of the epothilones onto the resin may also be effected in a chromatography column, by placing the resin in the column and running the centrifugate over the resin. After adsorption, the resin is washed with water.

The preferred processes according to the invention then start and proceed as follows: Desorption of the epothilones from the resin is preferably effected with a weakly polar or apolar solvent according to the invention, especially one described as preferred above or below, especially methylenechloride or most especially toluene. The solvent is then removed as far as necessary, preferably until a dry residue is obtained. Where appropriate, the residue is taken up in an alcohol/hydrocarbon mixture, especially in methanol/cyclohexane, preferably in the ratios described above, in a relatively low volume. The alcohol phase is evaporated, preferably to dryness, and the alcohol extract is then crystallized from a mixture of an alcohol, especially iso-propanol, and a hydrocarbon, especially cyclohexane, preferably in the ratios described above. The resulting solid crystallized material is then dissolved in a nitrile/water mixture, preferably as described above, especially a 2:3 (v/v) acetonitrile/water mixture, and the resulting feed solution is poured, if required, after splitting in more than one run, onto a preparative reversed phase column. Elution with nitrile/water, especially as just mentioned, follows. The (aceto-)nitrile of the resulting fractions containing epothilone, especially epothilone A and most especially epothilone B, is removed by evaporation (distillation), and the resulting water phase is extracted with an ester, especially isopropyl acetate. The ester extract is then evaporated, preferably to dryness, and subsequently the resulting material is recrystallized, for example an epothilone A fraction is crystallised directly from an ester/hydrocarbon mixture, e.g. ethyl acetate:toluene = 2:3, and the epothilone B fraction from an ester, especially ethyl acetate or preferably from an alcohol, especially methanol.

Especially with toluene a highly selective eluent (desorbant) has been discovered which allows to achieve an approximately 100 % yield in half of the desorption time needed with isopropanol used in WO 99/42602. Surprisingly, the amount of desorbed epothilones is increased, e.g. to 130 % after desorption with toluene when compared with isopropanol de-

sorption. (Though this appears *prima facie* impossible from a theoretical point of view, it nicely illustrates a major advantage of the present invention: The result is related to the assay of the loaded resin. As that assay made use of isopropanol for desorption, an incomplete desorption procedure had to be taken as basis leading originally to lower assay values which now turn out to be deceptive). The epothilone mixture can (without or with preceding crystallization) be applied directly to the reverse phase column. The process becomes highly robust with regard to the solvent amounts, the stirring rates and temperatures. While for alcohols (e.g. ethanol or isopropanol) under stirring a two-phase desorption can be shown where a first amount of epothilone comprising material is desorbed in a first period of time (explainable possibly by the pore size distribution found in polystyrene XAD-16 which has two maxima of distribution), a second amount after a further period of time, this undesirable behaviour is not found with toluene or also dichloromethane where all material is desorbed already in the first period of time. Under comparable conditions, the evaporation residue in the case of isopropanol for epothilones A and B in one example has been found to be 40 g, with methylene chloride 3.3 g, in the case of toluene only 0,9 g, with e.g. 17-18 g-% of epothilone B after desorption from styrene/divinylbenzene copolymer resins obtained from cyclodextrine-comprising culture supernatants as described in WO 99/42602, indicating much higher purity. While toluene has the most significant advantages, dichloromethane has as one advantage the ease of removal, due to the low boiling point.

The separation of epothilone A and B can also be achieved by performing the chromatography disclosed herein in its simulated moving bed (SMB) approach. SMB-chromatographies are widely used for the separation of binary mixtures, e.g., the separation of racemates on chiral stationary phases, e.g., the SORBEX processes in the petrochemical industries, like Parex or Molex, or the SAREX process in the sugar industry. Compared to batch chromatography SMB-chromatography provides the advantage of a continuous countercurrent unit operation; which leads to increased productivity and reduced mobile phase consumption. Several systematic procedures for the method development of SMB-chromatographies are known to the person skilled in the art. Such procedures are described, e.g., by R.-M. Nicoud, M. Bailly, J. Kinkel, R. M. Devant, T.R.E. Hampe and E. Küsters in *Proceedings of the 1<sup>st</sup> European Meeting on Simulated Moving Bed Chromatography*, (1993), ISBN 2-905-267-21-6, p.65-88; E. Küsters, G. Gerber and F.D. Antia, *Chromatographia*, 40 (1995) 387; T. Pröll and E. Küsters, *J. Chromatogr. A*, 800 (1998) 135; or C. Heuer, E. Küsters, T. Plattner and A. Seidel-Morgenstern, *J. Chromatogr. A*, 827 (1998) 175.

The basic parameters for the separation of epothilone A and B with SMB chromatography can be taken directly from the conventional LC separation. Preferably, reversed phase silica gel (RP 18) is taken as stationary phase and water/acetonitrile-mixtures as mobile phases. The final set of flow rates (for the individual SMB zones and the switching time, respectively) can be taken either from a simple flow scheme as developed by E. Küsters, et al in *Chromatographia*, 40 (1995) 387 or after careful estimation of adsorption isotherms as laid down in *J. Chromatogr. A*, 800 (1998) 135 and *J. Chromatogr. A*, 827 (1998) 175. The work up of extract and raffinate streams can again be performed as described for the conventional LC separation.

The invention most preferably relates to the processes and methods described in the subsequent examples.

#### Examples:

The following Examples serve to illustrate the invention without limiting its scope.

Caution: When handling epothilones, appropriate protective measures must be taken, where necessary, in view of their high toxicity.

#### Example 1: Work-up procedure for epothilone B

Desorption of 591.7 kg of charged resin (styrene/divinylbenzene copolymer resin XAD-16 charged with epothilones A and B from a culture medium) is effected by stirring the resin in two portions each with 720 litres of toluene in four portions for appr. 8 hours. Separation of the toluene phase from the resin takes place using a suction filter. The combined toluene phases are washed in two portions with each 250 l of water. After phase separation, the toluene extract is concentrated in a 1000 litres reactor to approximately 20-40 litres and afterwards concentrated to dryness in a rotary evaporator under vacuum. The result is a toluene extract of 4.095 kg containing 209 g of epothilone B. The toluene extract is dissolved in 16.5 litres of methanol and 24.5 litres of cyclohexane. After addition of 0.8 litres of water phase separation occurs immediately. The methanol fraction is evaporated to dryness in a rotary evaporator under vacuum yielding 1.025 kg evaporation residue containing 194 g of epothilone B. The methanol extract is afterwards being crystallized in a solvent mixture consisting of 2.05 litres isopropanol and 10.25 litres cyclohexane, yielding 0.4 kg crystallized material containing 184 g of epothilone B. The crystals are dissolved in 3.2 litres acetonitrile-

le/water = 2/3 (v/v) and the resulting feed solution is transferred in three separate runs onto a preparative reversed phase column (25 kg RP-18 spherical silica gel, YMC-Gel ODS-A 120; 5-15  $\mu$ m; Waters Corp., Milford, Massachusetts, USA). Elution is effected with acetonitrile/water = 2/3 (v/v) as mobile phase with a flow rate of 2.3 litres/min; retention time of epothilone A = 77-96 min, retention time of epothilone B 96-119 min. Fractionation is monitored with a UV detector at 250 nm. The acetonitrile of the combined epothilone B fractions (of the three runs) is distilled off and the remaining water phase is extracted with 504 litres of isopropyl acetate. The isopropyl acetate extract is concentrated in a 630 litres reactor to approximately 20-40 litres and afterwards concentrated to dryness in a rotary evaporator under vacuum. The weight of the evaporation residue of the epothilone B fractions is 170 g and it has a content of 98.4 % according to HPLC (external standard). The resulting material is finally crystallized in 2.89 litres of methanol at 0-5 °C yielding 150 g of epothilone B pure crystallisate.

Melting point: 124-125 °C;

<sup>1</sup>H-NMR data for epothilone B (500 MHz-NMR, solvent: DMSO-d<sub>6</sub>. Chemical displacement  $\delta$  in ppm relatively to TMS. S = singlet, d = doublet, m = multiplet):

| $\delta$ (Multiplicity) | Integral (number of H) |
|-------------------------|------------------------|
| 7.34 (s)                | 1                      |
| 6.50 (s)                | 1                      |
| 5.28 (d)                | 1                      |
| 5.08 (d)                | 1                      |
| 4.46 (d)                | 1                      |
| 4.08 (m)                | 1                      |
| 3.47 (m)                | 1                      |
| 3.11 (m)                | 1                      |
| 2.83 (dd)               | 1                      |
| 2.64 (s)                | 3                      |
| 2.36 (m)                | 2                      |
| 2.09 (s)                | 3                      |
| 2.04 (m)                | 1                      |
| 1.83 (m)                | 1                      |

- 15 -

|                           |   |
|---------------------------|---|
| 1.61 (m)                  | 1 |
| 1.47-1.24 (m)             | 4 |
| 1.18 (s)                  | 6 |
| 1.13 (m)                  | 2 |
| 1.06 (d)                  | 3 |
| 0.89 (d + s, overlapping) | 6 |
| $\Sigma = 41$             |   |

Example 2: Comparison of different desorption processes for epothilone B preparation:

360 ml each of an aqueous suspension of the styrene/divinylbenzene copolymer resin XAD-16 charged with epothilone A and B from a culture of myxobacteria by the method described in WO 99/42602 (corresponding to 194 g wet Amberlite® XAD-16) are extracted with the solvents and under the conditions mentioned in the subsequent table in a stirred (common lab anchor stirrer) glas reactor with a sintered frit at the bottom (home made solid phase batch reactor, inner diameter 10 cm x 20 cm lengths, "Stirrer /Frit" hereinafter).

---



---

Table 1: Comparison of Desorption methods for the manufacture of Epothilone B

Starting resin (resin with adsorbed epothilone):

- #1001 theoretical load 70 mg per 360 ml resin suspension (corresponds to 70 mg per 194 g of wet XAD-16)
- #1003 theoretical load 114 mg per 360 ml resin suspension (corresponds to 114 mg per 194 g of wet XAD-16)



| Variant                           | 1                     | 2                           | 3                           | 4                           | 5                 | 6               |
|-----------------------------------|-----------------------|-----------------------------|-----------------------------|-----------------------------|-------------------|-----------------|
| Reactor                           | Stirrer/Frit (RT)     | Stirrer/Frit (RT)           | Stirrer/Frit (RT)           | Stirrer/Frit (RT)           | Reflux (40°C)     | Refl. (42-45°C) |
| Starting Resin                    | #1001                 | #1001                       | #1003                       | #1003                       | #1003             | #1003           |
| Amount of Resin Suspension (ml)   | 360                   | 360                         | 360                         | 360                         | 360               | 180             |
| Desorption Solvent                | Isopropanol           | Methylenchloride            | Isopropanol                 | Methylenchloride            | Methylenchloride  | Isopropanol     |
| Stirring (rpm)                    | 250                   | 250                         | 250                         | 250                         | 250               | 250             |
| Volume (l)                        | 8 x 0.2 = 1.6         | 3 x 0.36 = 1.1 <sup>a</sup> | 5 x 0.72 <sup>i</sup> = 3.6 | 3 x 0.72 <sup>h</sup> = 2.2 | 1 x 2.2           | 1 x 1.8         |
| Desorption time (h)               | 8                     | 3                           | 5                           | 3                           | 2                 | 2               |
| Evaporation (h)                   | 2 <sup>e</sup>        | 0.5                         | 4 <sup>e</sup>              | None                        | None              | 2               |
| Water addition (l)                | 0.7                   | None <sup>b</sup>           | 1.15                        | None                        | None              | 0.54            |
| Extraction with ethyl acetate (l) | 1.1                   | None                        | 2.2                         | None                        | None              | 1.1             |
| Phase separation time (h)         | 24 <sup>c</sup>       | None                        | 15                          | None                        | None              | 15              |
| Evaporation (h)                   | 2                     | None                        | 2                           | 1                           | 1                 | 1               |
| Evaporation Residue (g)           | 5.84 <sup>i</sup>     | 3.37 <sup>d</sup>           | 3.31                        | 2.68 <sup>d</sup>           | 3.24 <sup>i</sup> | 1.70            |
| Content (%)                       | 1.26                  | 1.75                        | 2.9                         | 3.7                         | 3.1               | 3.3             |
| Yield: mg (%)                     | 74 (105) <sup>e</sup> | 59 (84)                     | 96 (84)                     | 99 (87)                     | 101 (89)          | 56 (98)         |

| Variant                           | 7              | 8                 | 9                | 10                     | 11               | 12                |
|-----------------------------------|----------------|-------------------|------------------|------------------------|------------------|-------------------|
| Reactor                           | Erl./mag. St.* | Stirrer/Frit (RT) | Reflux (42-45°C) | Stirrer/Frit (RT)      | Stir./Frit (RT)  | Stir./Frit (43°C) |
| Starting Resin                    | #1003          | #1003             | #1003            | #1003                  | #1003            | #1003             |
| Amount of Resin Suspension (ml)   | 100            | 360               | 180              | 360                    | 360              | 360               |
| Desorption Solvent                | Methylenchl.   | Toluene           | Isopropanol      | Toluene                | Toluene          | Toluene           |
| Stirring (rpm)                    | ?              | 640               | 250              | 250                    | 640              | 250               |
| Volume (l)                        | 1 x 0.5 = 0.5  | 3 x 0.72 = 2.2    | 1 x 1.8 = 1.8    | 4 x 0.36 = 1.44        | 4 x 0.36 = 1.44  | 4 x 0.36 = 1.44   |
| Desorption time (h)               | 5              | 3                 | 6                | 4                      | 4                | 4                 |
| Evaporation (h)                   | None           |                   | 6                | None                   | None             | None              |
| Water addition (l)                | None           | 0.5 <sup>l</sup>  | 0.54             | 0.5 <sup>k</sup>       | 0.5 <sup>k</sup> | 0.5 <sup>k</sup>  |
| Extraction with ethyl acetate (l) | None           | None              | 1.1              | None                   | None             | None              |
| Phase separation time (h)         | None           | 0.1               | 15               | 0.1                    | 0.1              | 0.1               |
| Evaporation (h)                   | 1              | 1                 | 1                | 1                      | 1                | 1                 |
| Evaporation Residue (g)           | 4.38           | 0.88              | 2.32             | 0.75                   | 0.88             | 0.95              |
| Content (%)                       | 0.5            | 17.4              | 2.69             | 17.6                   | 17.1             | 15.8              |
| Yield: mg (%)                     | 22 (69)        | 153 (134)         | 62.5 (110)       | 132 (116) <sup>l</sup> | 150 (132)        | 150 (132)         |

a Not optimized; in case of 2 extractions about 5 % yield are lost.

- b 3-fold back-extraction with water removes no polar component
- c First of 3 phase separations overnight
- d The material, when compared to ethyl acetate-evaporation residue, can be chromatographed much better on silica gel
- e Corresponds to an evaporation residue of about 25 to 30 g
- f Drying oven (high vacuum) over the weekend
- g Possibly a result of the, concerning the time used, generous first phase separation
- h Recovery: 1<sup>st</sup> extraction = 700 ml; 2<sup>nd</sup> extraction = 660 ml; 3<sup>rd</sup> extraction = 680 ml
- i Recovery: 1<sup>st</sup> extraction = 670 ml; 2<sup>nd</sup> extraction = 710 ml; 3<sup>rd</sup> extraction = 720 ml
- j The necessity of water addition has not yet been confirmed
- k Simplifies the removal of the water originally present (XAD-16 is covered by water as used)
- l In view of the results of variant 8, 11 and 12 and the elution curves for all experiments with toluene, the use of a smaller amount of resin cannot be excluded.

„Erl./mag. St.“ stands for magnetic stirring in an Erlenmeyer flask.

„Methylenchloride“ („Methylenchl.“) is dichloromethane

„Stir./Frit“ stands for Stirrer/Frit

„RT“ stands for room temperature

---



---

From these experiments and further data, it can be deduced that in comparison with isopropanol the methylenechloride extraction offers better selectivity, a shorter time of extraction (approximately by a factor of 2), faster solvent distillation (boiling point of methylene chloride is about 40 °C, that of isopropanol 81-83 °C), the time-intensive and very problematic ethyl acetate/water phase separation is no longer required, the second solvent distillation is no more required, so that a lower number of process steps, resulting in lower contamination risk, better and safer handling, can be used; workup in half of the volume (e.g. in 1000 l reactors instead of 2000 l reactors) is possible; the product epothilone B has a better purity profile (fewer by-products with comparable polarity as epothilone B), and the evaporation residue does not sputter and foam as in the case with the ethyl acetate extraction. For desorption with toluene, a higher yield is obtained in comparison to isopropanol extraction (about 100 instead of about 80 %), better selectivity can be observed (with isopropanol, about the tenfold amount of by-products is desorbed), the extraction time is shortened considerably (by a factor of about 3), the difficult filtration after desorption with isopropanol is simplified (the isopropanol extraction was difficult to implement in larger scale), the second solvent distillation is no longer required, work-up is possible in smaller reactors (again, for example, it is possible to use a 1000 l instead of a 2000 l reactor), it is possible to abandon the silica gel chromatography (the evaporation residue after desorption contains already about 40 % of an epothilone A/B-mixture), and the evaporation residue after desorption does not show the foaming and sputtering observed for the residue from ethyl acetate extraction.

What is claimed is:

1. A process for desorbing epothilones from a resin, said process making use of a weakly polar or apolar solvent.
2. The process according to claim 1 wherein the epothilones to be desorbed are epothilone A or epothilone B.
3. The process according to any one of claims 1 or 2 wherein the resin is a synthetic resin.
4. The process according to claim 3 wherein the resin is a synthetic resin based on styrene/divinylbenzene copolymers.
5. The process according to any one of claims 1 to 4 wherein the weakly polar or apolar solvent is selected from the group consisting of lower alkyl halogenides and aromatic solvents or a mixture of two or more such solvents.
6. The process according to claim 5, wherein an aromatic solvent is used selected from the group consisting of naphthalene, benzene, or naphthalene or benzene substituted by one or more moieties selected from the group consisting of lower alkyl, lower alkoxy, halogen, nitro and lower alkoxy-lower alkyl.
7. A process for the isolation of epothilones adsorbed to a synthetic resin which process comprises
  - (iii) the desorption of the epothilones from said synthetic resin with a weakly polar or apolar solvent; and
  - (iv) separation of the epothilones by reversed-phase chromatography after being taken up in a suitable solvent and elution with a mixture of nitrile and water.
8. A process according to any one of claims 1 to 7, further including any further purification steps desirable or required to come to the respective epothilones in pure form.
9. A process of working up epothilones from a reaction mixture, said process comprising
  - desorbing the epothilones with a weakly polar or apolar solvent, in particular with a lower alkyl halogenide or an aromatic solvent, where the step of desorption may be repeated in order to achieve more complete desorption;
  - removing the solvent used for desorption from the resulting solutions by evaporation;

- optionally crystallizing the epothilone(s) after desorption; especially, for the crystallization of epothilone B, adding a mixture of an alcohol and a hydrocarbon, especially of a lower alkanol and a cyclic aliphatic hydrocarbon with 3 to 10 ring atoms, and evaporating the alcohol phase to dryness, and crystallizing the epothilone B from an appropriate solvent mixture, especially from an alcohol/cyclic aliphatic hydrocarbon mixture;
- (obligatory step) separating the epothilones by reversed-phase chromatography taking up the residue from the preceding step in a suitable solvent, especially a mixture of a nitrile and water, and eluting with a mixture of nitrile and water, preferably characterised in that the chromatography is carried out on column of a reversed phase material which is charged with hydrocarbon chains, especially an RP-18 material comprising hydrocarbon chains containing 18 carbon atoms, and an eluant comprising a nitrile, especially a lower alkyl nitrile, is used, in particular a mixture of nitrile/water is used, especially a mixture of acetonitrile/water; and removing the nitrile from the collected epothilone comprising fractions by evaporation; if desired, the remaining water with the epothilone is then extracted with an ester, especially a lower alkyl-lower alkanoate with subsequent evaporation of the epothilone containing ester phase to dryness;
- optionally further purifying by adsorption chromatography, in particular by adding to a column of silica gel and eluting with an appropriate solvent or solvent mixture;
- and finally recrystallizing a purified epothilone from appropriate solvents or solvent mixtures;

In which process, if necessary and/or desired, between each step being employed, the resulting solutions or suspensions are concentrated, and/or liquid and solid components are separated from one another, in particular by sedimenting, filtering or centrifuging of solutions/suspensions.

10. A process according to claim 9, where desorption of the epothilones from the resin is effected with a weakly polar or apolar solvent, especially as mentioned as being preferred in claim 5 or 6; the solvent is then removed as far as necessary, preferably until a dry residue is obtained, where appropriate, the residue is taken up in an alcohol/hydrocarbon mixture in a relatively low volume; the alcohol phase is evaporated, preferably to dryness, and the alcohol extract is then crystallized from a mixture of an alcohol and a hydrocarbon the resulting solid crystallized material is then dissolved in a nitrile/water mixture as described in claim 8, especially a 2:3 (v/v) acetonitrile/water mixture, and the resulting

feed solution is poured, if required, after splitting in more than one run, onto the preparative reversed phase column; followed by elution with nitrile/water; then removal of the nitrile of the resulting fractions containing epothilone by evaporation follows and the resulting water phase is extracted with an ester; said ester extract is then evaporated and subsequently the resulting material is recrystallized.

11. A process according to any one of claims 7, 9 or 10 wherein the separation of epothilone A and B is achieved by simulated moving bed (SMB) chromatography.
12. The use of a weakly polar or apolar solvent for the desorption of epothilones from a resin.
13. The use according to claim 12, wherein the weakly polar or apolar solvent is selected from the group consisting of lower alkyl halogenides and aromatic solvents, especially naphthalene, benzene or naphthalene or benzene substituted by one or more moieties selected from the group consisting of lower alkyl, lower alkoxy, halogen, nitro and lower alkoxy-lower alkyl; or a mixture of two or more such solvents; the resin is a synthetic resin.

## INTERNATIONAL SEARCH REPORT

International Application No.

PCT/EP 01/14771

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 C07D493/04

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C07D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, CHEM ABS Data, BEILSTEIN Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages  | Relevant to claim No. |
|------------|---|-----------------------|
| X          | WO 99 42602 A (NOVARTIS ERFIND VERWALT GMBH; NOVARTIS AG (CH))<br>26 August 1999 (1999-08-26)<br>Claims 12-14; pages 37-38, example 3; page 9, paragraph 2. | 1,7,9,12              |
| A          | WO 93 10121 A (CIBA GEIGY AG; BIOTECHNOLOG FORSCHUNG GMBH (DE))<br>27 May 1993 (1993-05-27)<br>Page 8, last paragraph.                                      | 1-13                  |
| A          | WO 98 22461 A (BIOTECHNOLOG FORSCHUNG GMBH; GERTH KLAUS (DE); HOEFLE GERHARD (DE)) 28 May 1998 (1998-05-28)<br>Claim 1, step c.                             | 1-13                  |
|            | -/-   |                       |

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*Z\* document member of the same patent family

Date of the actual completion of the international search

6 March 2002

Date of mailing of the international search report

22/03/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5918 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-5016

Authorized officer

Weisbrod, T



## INTERNATIONAL SEARCH REPORT

International Application No.

PCT/EP 01/14771

| C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT |   |                       |
|--|---|-----------------------|
| Category *   | Citation of document, with indication, where appropriate, of the relevant passages  | Relevant to claim No. |
| A  | NICOLAOU K C ET AL: "Probing the ring size of epothilones: total synthesis of '14!-, '15!-, '17!-, and '18!Epothilones A"<br>ANGEWANDTE CHEMIE. INTERNATIONAL EDITION, VERLAG CHEMIE. WEINHEIM, DE, vol. 37, no. 1/2, 1998, pages 81-84, XP002131226<br>ISSN: 0570-0833<br>the whole document | 1-13                  |
| A  | NICOLAOU K C ET AL: "Chemical Biology of Epothilones"<br>ANGEWANDTE CHEMIE. INTERNATIONAL EDITION, VERLAG CHEMIE. WEINHEIM, DE, vol. 37, no. 15, August 1998 (1998-08), pages 2014-2045, XP002131418<br>ISSN: 0570-0833<br>Tables 2-6.  | 1-13                  |
| A  | REICHHARDT, C.: "Solvents and Solvent Effects in Organic Chemistry, 2nd. ed." 1988, VCH, WEINHEIM XP002192137<br>Page 60, lines 5-7: "the term polarity itself has, until now, not been precisely defined".   | 1-13                  |

## FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

Continuation of Box I.2

Claims Nos.: 1 and 3-13 (all part)

The present claims 1 and 3-13 relate to processes comprising desorbing epothilones from a resin respectively the use of a weakly polar or apolar solvent for desorbing epothilones from a resin. The term epothilone, however, is not precisely defined in the technical field. Along with the parent compounds, i.e. the 16-membered thiazole-comprising macrolides epothilones A and B, the term epothilone and epothilone derivative includes inter alia 14- to 18-membered macrolides with or without annelated oxirane ring, compounds with modified configuration of stereocentres or modified geometry of double bonds, as well as compounds wherein the side-chain thiazole has been replaced (cf. Angew. Chem. Int. Ed. 1998, 37, pp. 81-83, and pp. 2015-2045). The said claims relate thus to methods and uses for the desorption of an extremely large number of diverse possible compounds. Support within the meaning of Article 6 PCT and/or disclosure within the meaning of Article 5 PCT is to be found, however, for only a very small proportion of the claimed methods and uses i.e. for the desorption of natural epothilone B (cf. examples). In the present case, the claims so lack support, and the application so lacks disclosure, that a meaningful search over the whole of the claimed scope is impossible. Consequently, the search has been carried out for those parts of the claims which appear to be supported and disclosed, namely those parts directed to methods and uses relating to the natural 16-membered epothilones A-F.

The applicant's attention is drawn to the fact that claims, or parts of claims, relating to inventions in respect of which no international search report has been established need not be the subject of an international preliminary examination (Rule 66.1(e) PCT). The applicant is advised that the EPO policy when acting as an International Preliminary Examining Authority is normally not to carry out a preliminary examination on matter which has not been searched. This is the case irrespective of whether or not the claims are amended following receipt of the search report or during any Chapter II procedure.

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 01/14771

| Patent document<br>cited in search report |   | Publication<br>date | Patent family<br>member(s) | Publication<br>date |
|---|---|---------------------|----------------------------|---------------------|
| WO 9942602                                | A | 26-08-1999          | AU 3028799 A               | 06-09-1999          |
|   |   |                     | BR 9908119 A               | 24-10-2000          |
|   |   |                     | CN 1291239 T               | 11-04-2001          |
|   |   |                     | WO 9942602 A2              | 26-08-1999          |
|   |   |                     | EP 1054994 A2              | 29-11-2000          |
|   |   |                     | HU 0100855 A2              | 28-06-2001          |
|   |   |                     | NO 20004114 A              | 17-10-2000          |
|   |   |                     | PL 342423 A1               | 04-06-2001          |
|   |   |                     | SK 12402000 A3             | 10-05-2001          |
|   |   |                     | TR 200002431 T2            | 22-01-2001          |
|   |   |                     | US 6194181 B1              | 27-02-2001          |
| WO 9310121                                | A | 27-05-1993          | DE 4138042 A1              | 27-05-1993          |
|   |   |                     | AU 2943792 A               | 15-06-1993          |
|   |   |                     | WO 9310121 A1              | 27-05-1993          |
| WO 9822461                                | A | 28-05-1998          | AU 5483798 A               | 10-06-1998          |
|   |   |                     | BR 9713363 A               | 25-01-2000          |
|   |   |                     | CN 1237970 A               | 08-12-1999          |
|   |   |                     | CZ 9901750 A3              | 15-09-1999          |
|   |   |                     | WO 9822461 A1              | 28-05-1998          |
|   |   |                     | EP 0941227 A1              | 15-09-1999          |
|   |   |                     | HU 0000497 A2              | 28-06-2000          |
|   |   |                     | JP 2001504474 T            | 03-04-2001          |
|   |   |                     | NO 992338 A                | 14-05-1999          |
|   |   |                     | PL 333435 A1               | 06-12-1999          |
|   |   |                     | TW 408119 B                | 11-10-2000          |
|   |   |                     | ZA 9710384 A               | 18-05-1999          |

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**